



JEB
Partitions

INTEGRA

Project Reference Presentation




JEB
Partitions

Establish a positive workplace **CULTURE**, a strong **IDENTITY** and a captivating **ATMOSPHERE** with premier products.



WHERE WE ARE

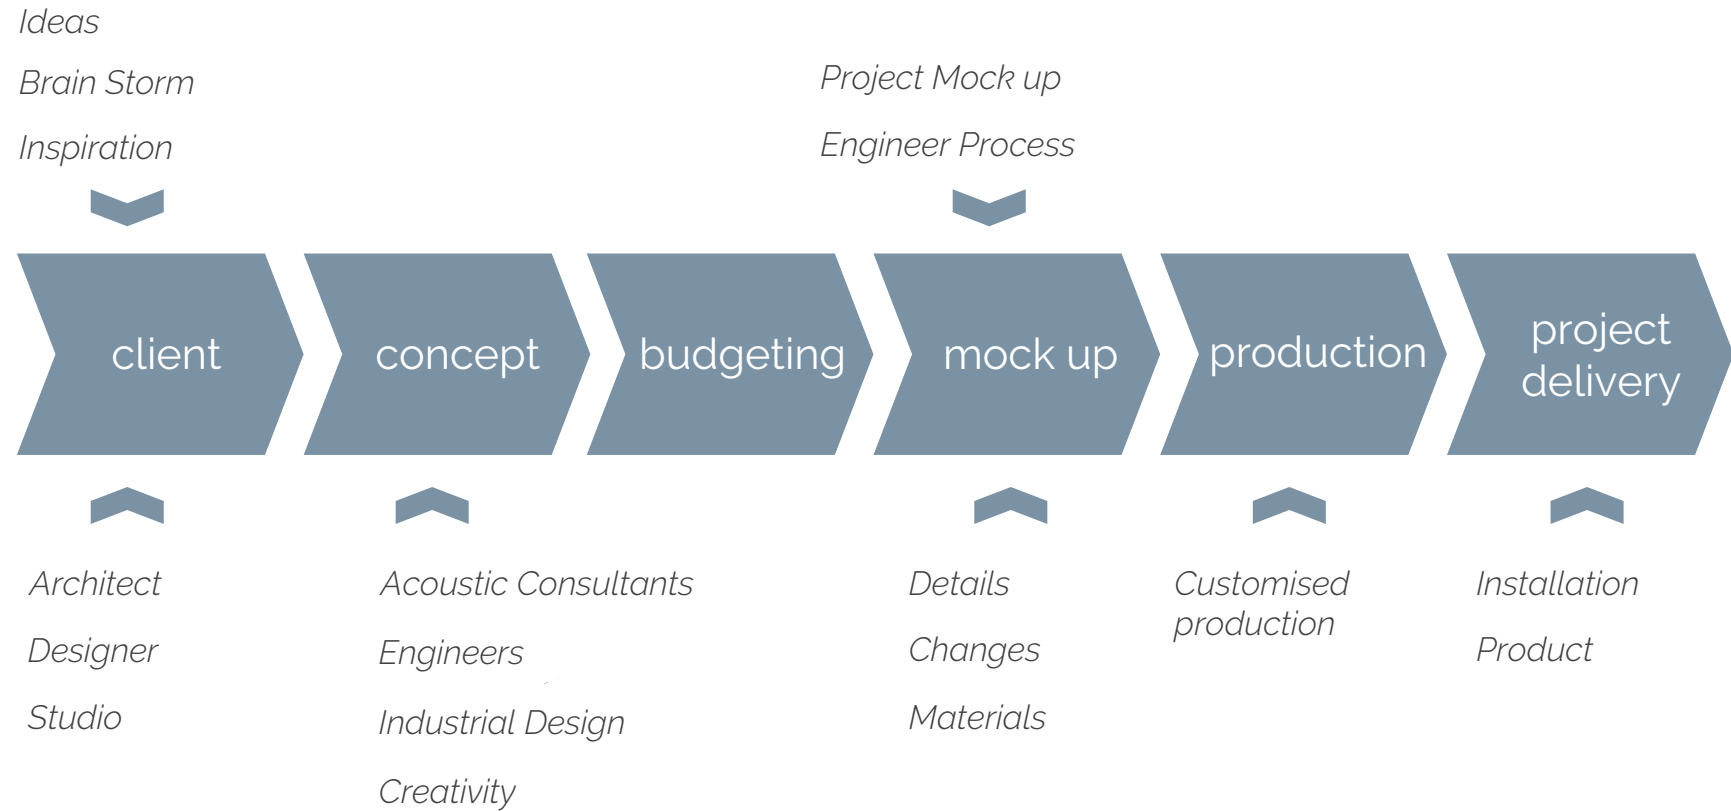


OUR SERVICES

INTEGRA


INTEGRA operable walls, both glass and solid, are constructed with vertical stiles and 2-way or 3-way junctions. Its range of thickness provides various acoustic levels for different requirements and budgets.

With our signature switchable glass panels, users can choose between light transmission and instant visual privacy with one click.


Vertical Section /
INTEGRA T-100

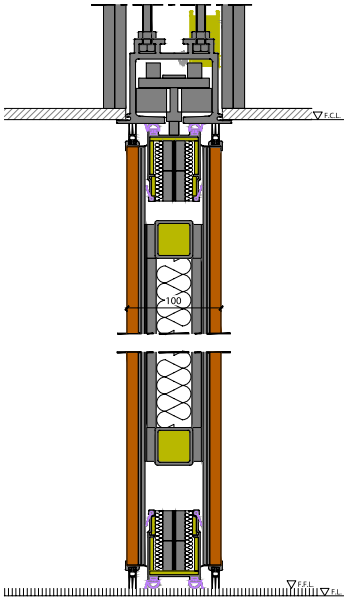

Vertical Section /
INTEGRA T-90

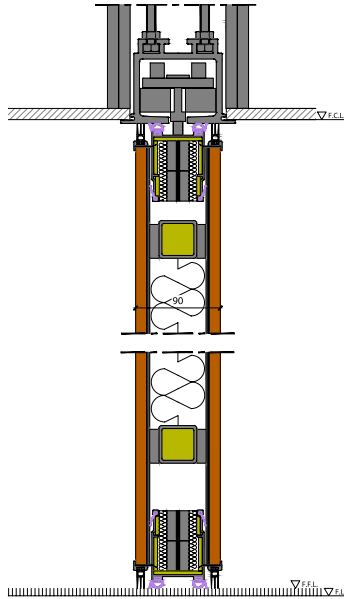


Vertical Section /
INTEGRA 8-90

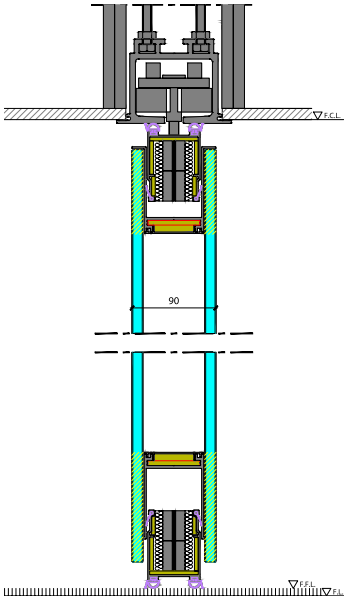


INTEGRA SYSTEM

Vertical Section /
INTEGRA T-75

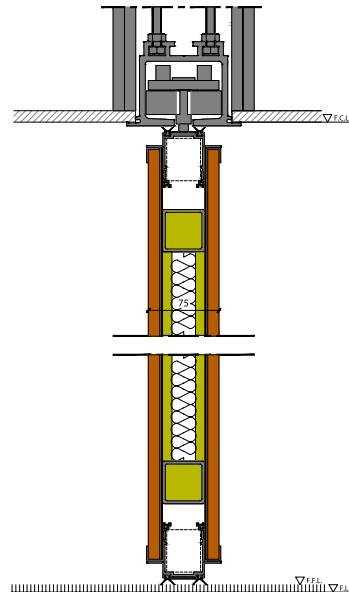


Vertical Section /
INTEGRA 8-75

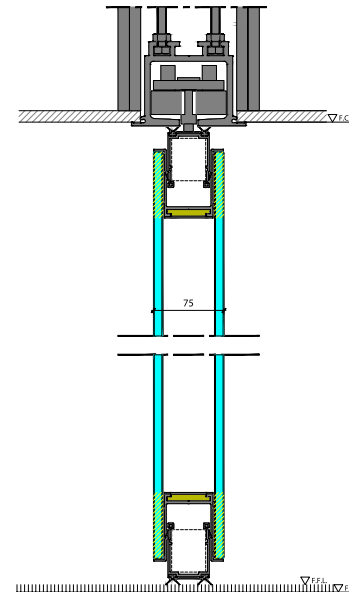


INTEGRA SYSTEM

TYPE		INTEGR 8 Smart Glass/Clear Glass				INTEGRA T Bare Finish				
Characteristics		The movable wall for superior sound insulation								
Dimensions	Panel thickness	75mm		90mm		100mm	90mm	75mm		
	Panel width	700 - 1200mm								
Construction	Frame material	Aluminum & Steel								
	Panel connection (vertical joints)	Aluminum tongue and groove profile incorporating with dual vinyl acoustical seals.								
	Vertical sound seals	Deep interlock but easy detach, incorporating with dual vinyl acoustical seals.								
	Horizontal sound seals	Semi-auto release top & bottom retractable seals		Both top & bottom retractable seals are easily simultaneously activated by handle using a bit of strength. Seals do not contact floor or track during movement of the panels			Semi-auto release top & bottom retractable seals			
	Panel face / Finish -	5+0.76PVB+5mm laminated glass & 6+0.76PVB+4mm laminated glass - 47 dB	10mm thick tempered glass on both sides -	43 dB	5+1.52PVB+5mm laminated glass & 6+1.52PVB+4mm laminated glass -	47 dB	10mm thick tempered glass on both sides -	44 dB	12mm thick chipboard on both sides	
		Sound insulation in STC (dB)	5+1.52PVB+5mm laminated glass & 10mm thick tempered glass -	46 dB		5+1.52PVB+5mm laminated glass & 10mm thick tempered glass -	46 dB	6+1.52PVB+6mm laminated glass on both sides -		48 dB
Technical Information	Top clearance	5mm	25-40mm					5mm		
	Bottom clearance	5mm	25-40mm					5mm		
	Telescopic panel						Wall pressure bar with extended telescope element			

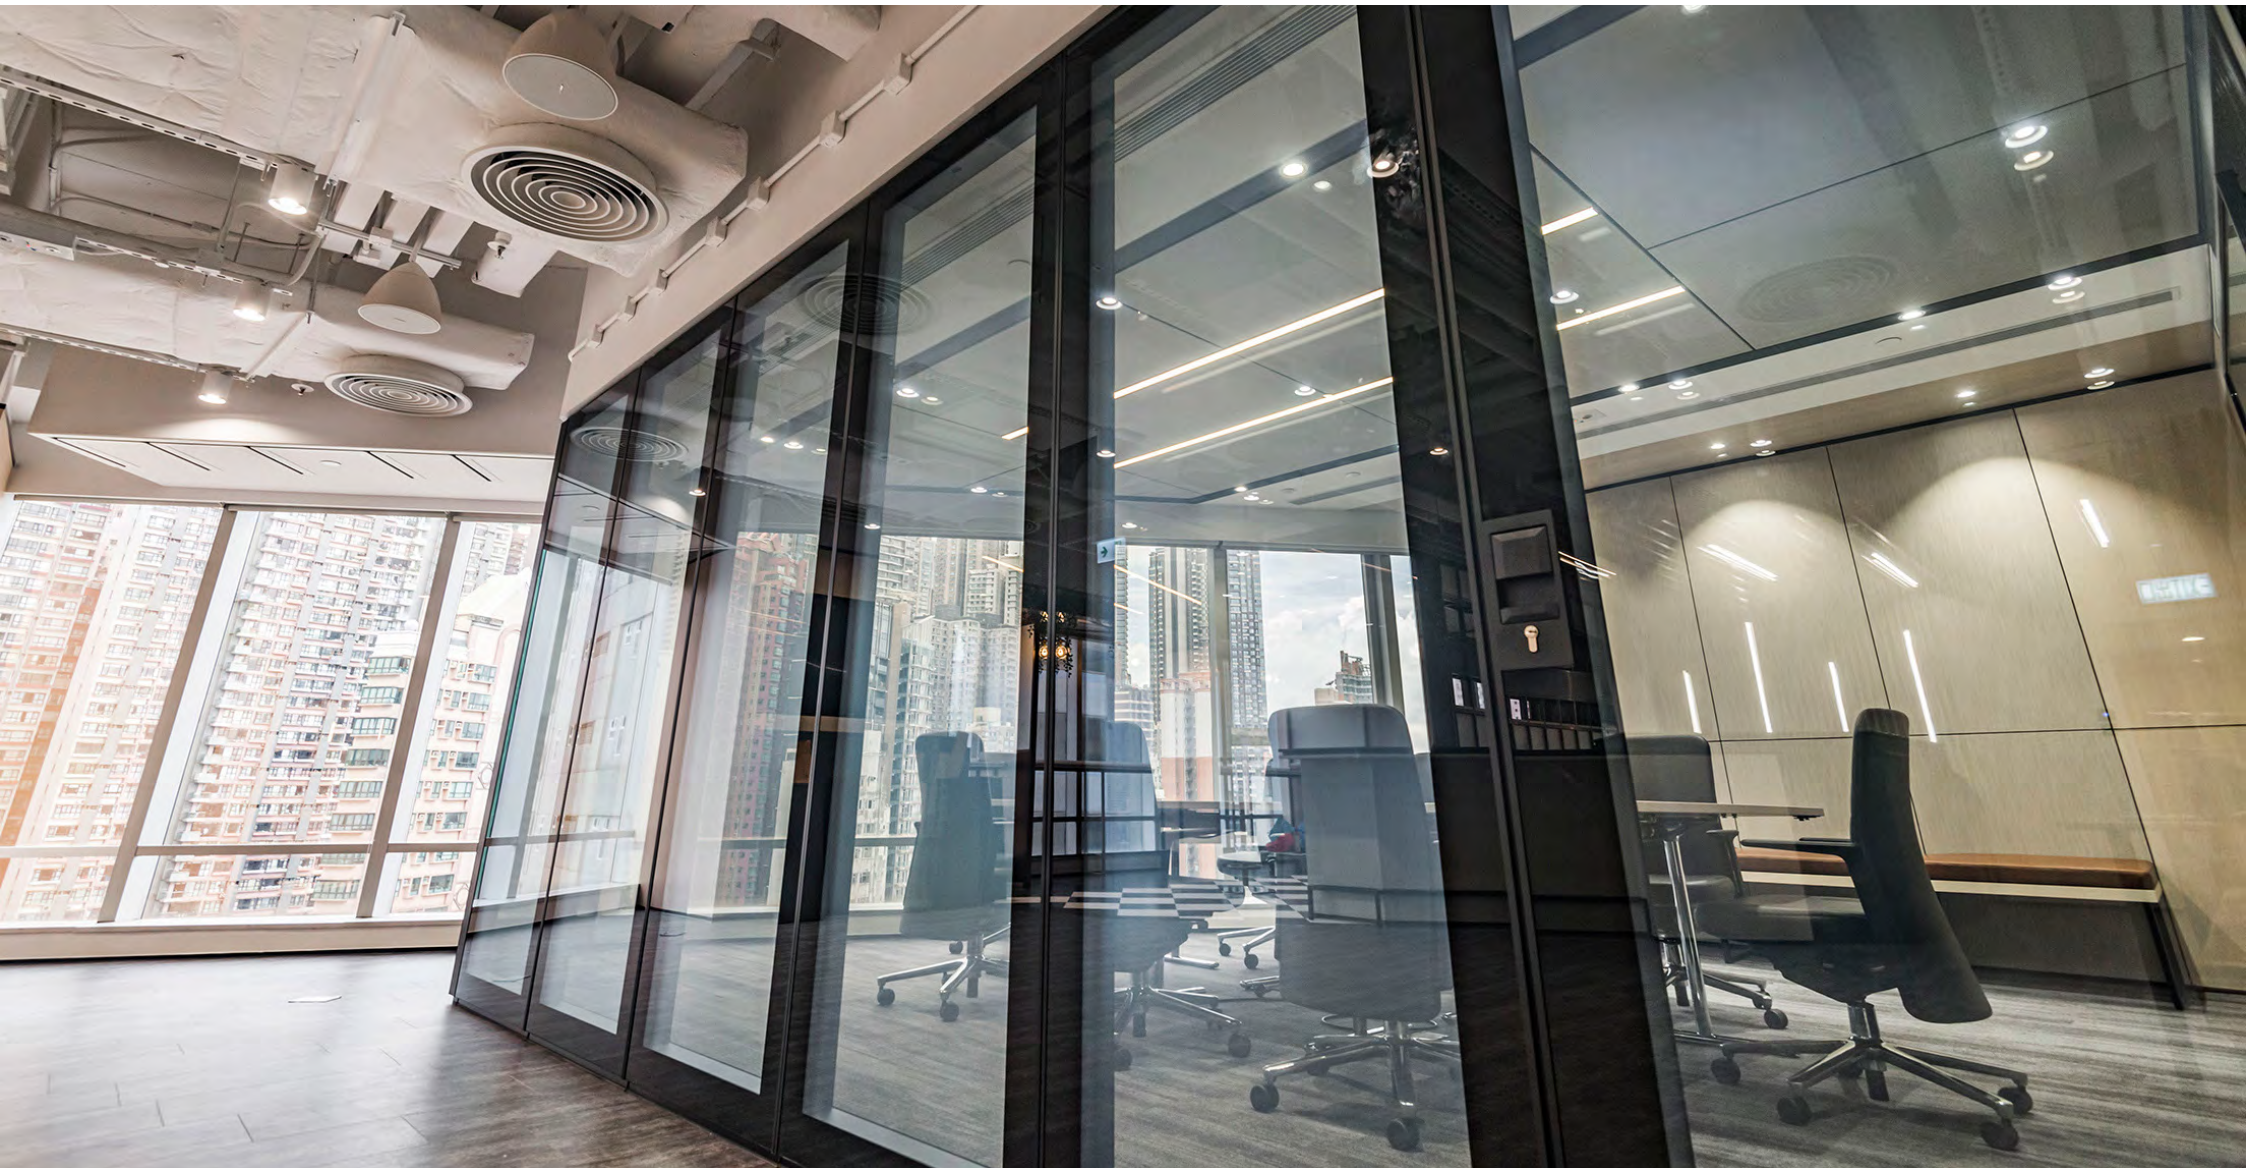


BLOCK ONE

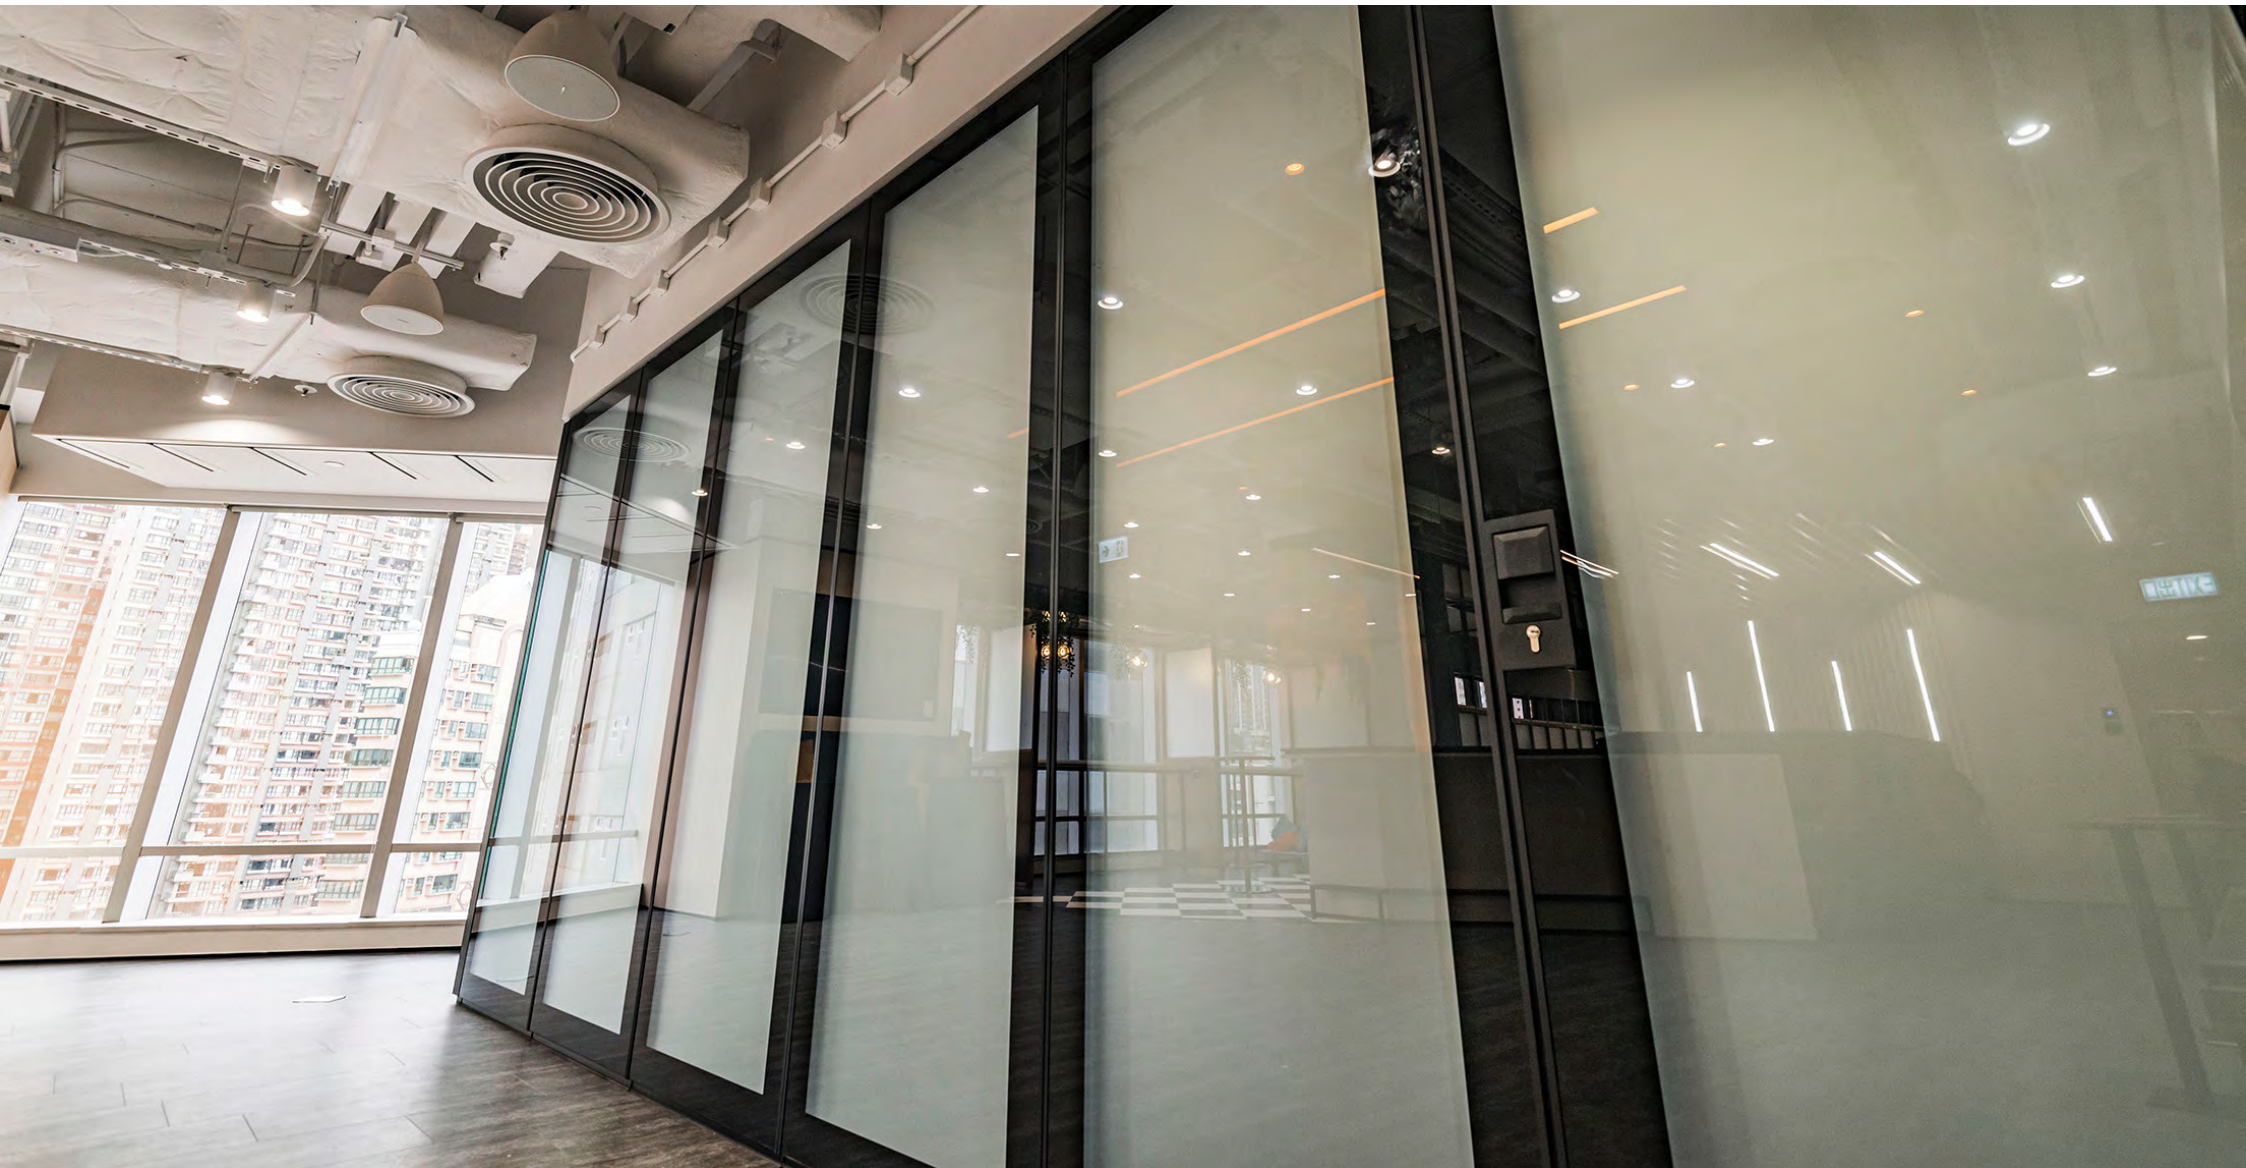

BLOCK ONE



HSBC

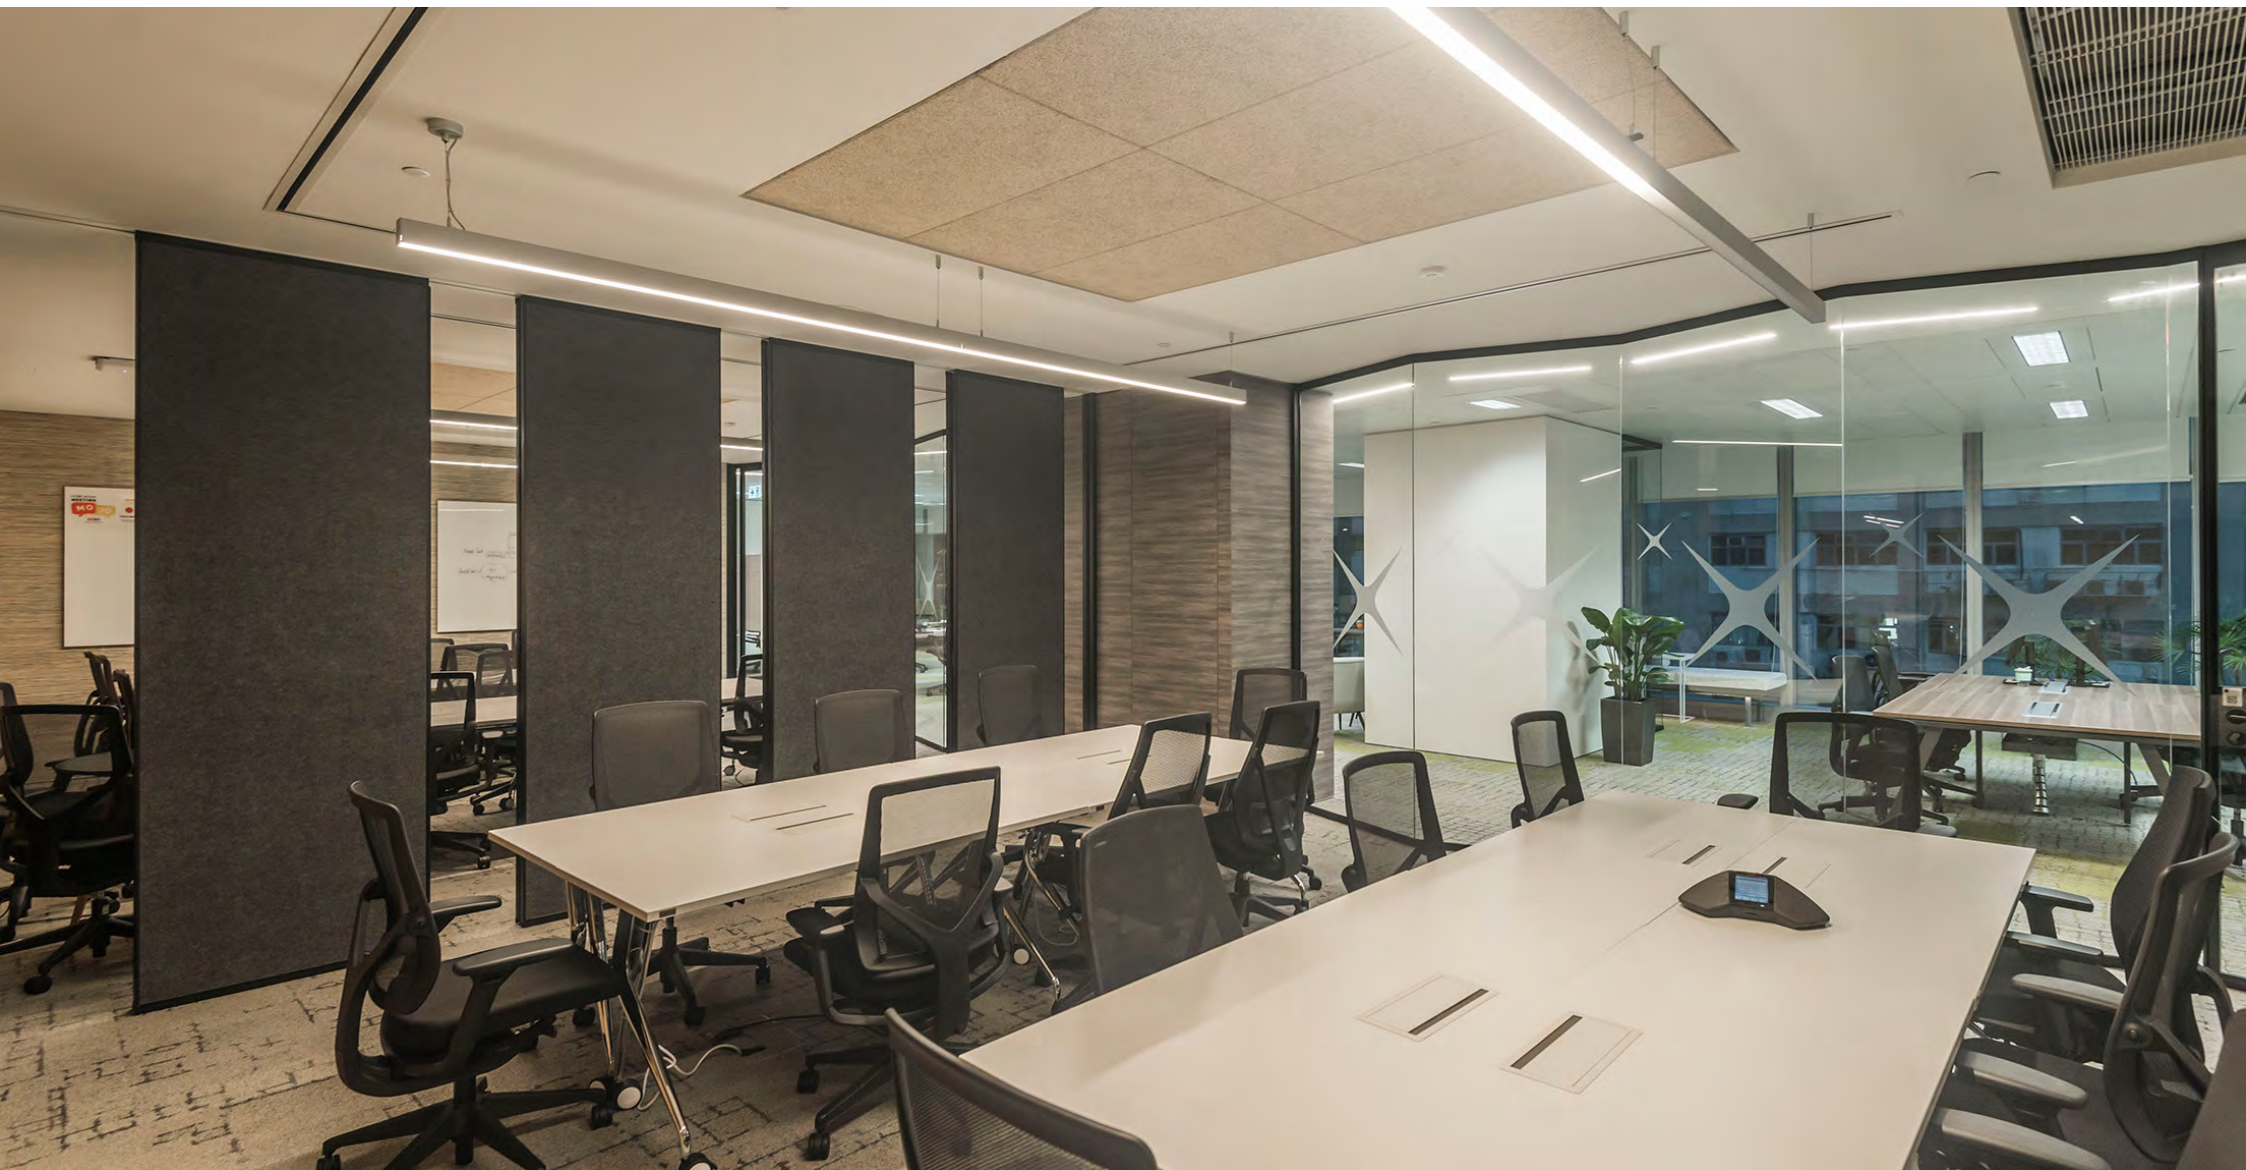







ORACLE



PIFZER



PIFZER



BARINGS



PORSCHE





VF CORPORATION





AON



EATON HOUSE



CHINA LIFE



GUOSEN SECURITIES



MANULIFE




FOX INTERNATIONAL CHANNELS



PFIZER



AUSTRALIA SHOWROOM

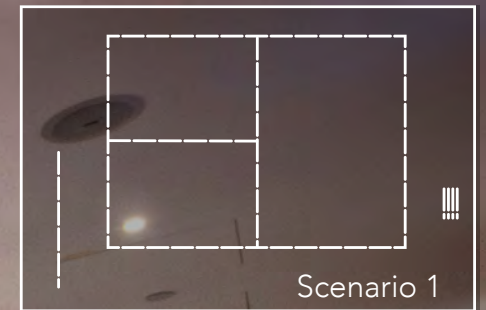



ELI LILY



DENTSU AEGIS NETWORK



AT&T



HKEX

Handle /
Standard Level Handle



Handle /
Boxed Recess Lever handle



Handle /
Lift-up Handle



Handle /
Squash Court Ring Handle



HANDLES



Partitions

JEB GREATER CHINA LTD

5A Cheung Wah Industrial Building,
10 Shipyard Lane, Quarry Bay, Hong Kong

P +852 2520 2839 F +852 2861 2089

JebInternational.com